

# ECWP Eco Mini Wall Pack



## Outdoor

The ATG ECWP series is a robust retrofit that outperforms outdated wall mounted HID fixtures. It combines energy-efficiency, high performance, and rugged construction with a slim profile design to deliver enhanced performance to outdoor wall-mounted lighting applications.



| Luminaire | Mini Wall Pack | Type |
|-----------|----------------|------|
| Project   |                |      |
| Product   |                |      |
| Notes     |                |      |

### Features

- Built from die-cast aluminum
- IP65 Silicon Gasket
- Built-in dusk to dawn photocell
- Safety Mechanism against accidental closing



### Order Format

Sample: ECWP-15-40

| Series               | Wattage                         | CCT                       | Voltage             | Dimming             | Photocell                | Finish Color |
|----------------------|---------------------------------|---------------------------|---------------------|---------------------|--------------------------|--------------|
| ECWP<br>=Eco Mini WP | -<br>15=15W<br>20=20W<br>30=30W | -<br>40=4000K<br>50=5000K | -<br>Blank=100-277V | -<br>ND=Non-Dimming | Blank=With<br>NP=Without | Blank=Bronze |

### Application

The ECWP Series is typically found within parking structures or along main buildings, providing security lighting. It can be used for building facade, retail, commercial, industrial exteriors applications.

### Construction

The robust design of the Mini is precision manufactured from Die-cast aluminum. The rugged die-casting housing provides advanced thermal management for long life and weather proof compartment to withstand challenging, outdoor environments. It is available with frosted polycarbonate lens.

### Electrical

15W, 20W and 30W models are available for the Mini Wall Pack. The calculated L70 lifespan of this fixture is greater than 75,000 hours with a standard input of 120-277VAC.

### Optics

Color accuracy is rated at 80+ CRI, in a color temperature of 4000K and 5000K.

### Certifications

- DLC Premium
- RoHS
- ETL listed
- CE
- Title 14
- IP65 rated


|                            |                               |
|----------------------------|-------------------------------|
| <b>Input Voltage (VAC)</b> | 120-277                       |
| <b>CRI</b>                 | 80                            |
| <b>CCT(K)</b>              | 4000, 5000                    |
| <b>PF</b>                  | .9                            |
| <b>THD</b>                 | 15%                           |
| <b>L70 (Hours)</b>         | >75,000                       |
| <b>Color</b>               | Bronze Powdercoat             |
| <b>Housing</b>             | Die-Cast Aluminum             |
| <b>Lens Material</b>       | PC Plastic Diffuser           |
| <b>Lens Type</b>           | Frosted                       |
| <b>Temperature Range</b>   | -4°F to 113°F (-20°C to 45°C) |
| <b>Warranty</b>            | 5 Years                       |

**Lumen Data**

| Part Number | System Wattage | Lumen | CCT  | Efficacy (Lm/W) |
|-------------|----------------|-------|------|-----------------|
| ECWP-15-40  | 14             | 1931  | 4000 | 134             |
| ECWP-15-50  | 14             | 1954  | 5000 | 135             |
| ECWP-20-40  | 20             | 2584  | 4000 | 130             |
| ECWP-20-50  | 20             | 2652  | 5000 | 133             |
| ECWP-30-40  | 28             | 3372  | 4000 | 119             |
| ECWP-30-50  | 28             | 3437  | 5000 | 121             |

**Dimensions**

15W  
20W  
30W

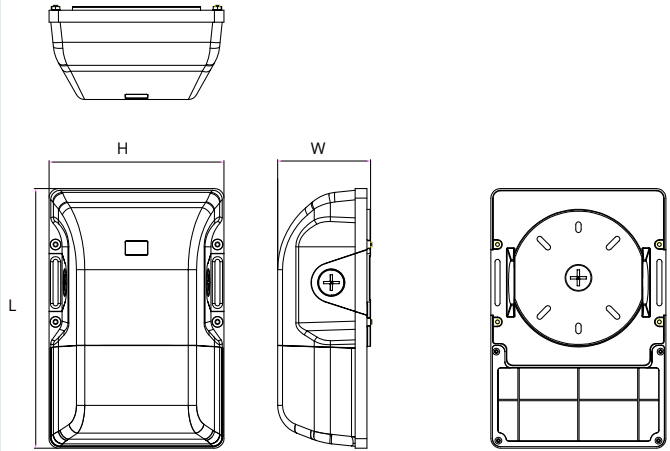

| Part No. | Length (L) | Height(W) | Width(W) |
|----------|------------|-----------|----------|
| ECWP     | 8.5"       | 5.8"      | 3.0"     |

Recorded in inches