

## Installation Guide


### IMPORTANT SAFETY INFORMATION

- WARNING : RISK OF SHOCK** House electric current can cause painful shock or serious injury unless handled properly. For your safety, always remember to :
  - Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
  - Ground the fixture to avoid potential electric shocks and to ensure reliable starting.
  - Double-check all connections to be sure they are tight and correct.
  - Wear rubber soled shoes and work on a sturdy wooden ladder.
- This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.
- WARNING : RISK OF CUTS** Some metal parts in the fixture may have sharp edges. To prevent cuts and scrapes, wear gloves when handling the parts.
- Account for small parts and destroy packing material, as these may be hazardous to children.


### Product Specification

Size (mm)	EM Power	Input Voltage	Emergency Time
Φ180X35mm	9W	AC120V	≥90min
Φ225X35mm	12W	AC120V	≥90min

### Surface mounting installation

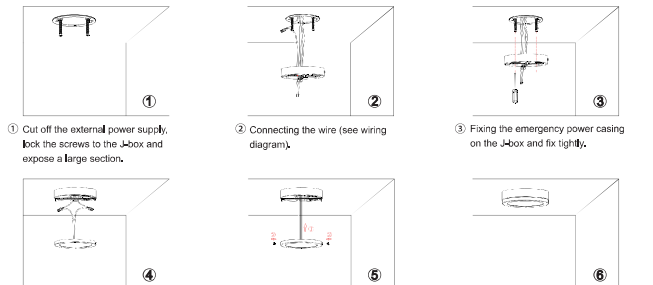- 
- Cut off the external power supply, lock the screws to the J-box and expose a large section.
  - Connecting the wire (see wiring diagram).
  - Fixing the emergency power casing on the J-box and fix tightly.
  - Connect the wires with the cap.
  - Secure the fixture to the emergency power casing mounting bracket(see 1), then plug in the fixed rubber plugs on both sides(see 2).
  - Shake the fixture, check the reliability of installation, and then power on to confirm that the fixture proper functioning, then installation is completed.

### Wiring diagram




## Emergency function

The light auto shift to Emergency Mode in the case of power off


### 1.Ordinary Working Mode

Connecting the light with power correctly . Charging Indicator On;

Press SWITCH to turn on/off the light

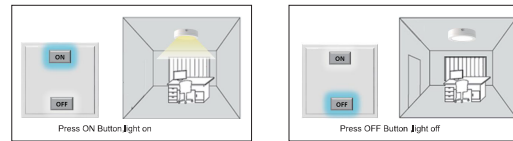


Press TEST Switch Button to test emergency function



### 2.Emergency Working Mode

No power supply, Charging Indicator off,  
the light shift to Emergency Mode, the power is around 12W



- WARNING :** Risk of fire, Use AC120V 60Hz circuits.
- Suitable for damp locations, Before installing your lighting fixture, thoroughly review enclosed installation manual. If you do not have sufficient electrical wiring experience, please refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician. All electrical connections must be in accordance with local and National Electrical Code(NEC) standards. Reliable operating temperature is 0 to +40 degrees Celsius(32 to +104 degrees Fahrenheit).
- pls obey fire prevention regulations, do not cover the fixture with any heat insulated materials.
- Do not change the LED light source or driver inside under any circumstance.

**Warranty:** 5 years warranty

