ATG
ELECTRONICS




DR4T

4" DUO SELECTABLE RETROFIT DOWNLIGHT

DR4T
4" DUO SELECTABLE RETROFIT DOWNLIGHT



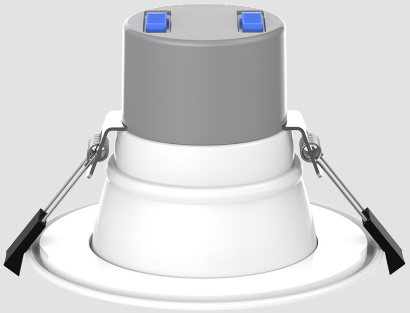

DESCRIPTION

4" Retrofit Downlight / Power & CCT Selectable / 0-10V Dimming / 120-277Vac Input


PRODUCT FEATURES

- Power Selectable: Adjust wattage between 6W / 8W / 10W / 12W/16W
- CCT Selectable: Adjust CCT between 2700K / 3000K / 3500K / 4000K / 5000K
- Ambient operating temperature: -4°F (-20°C) to 104°F (40°C)
- PF>0.9, THD<20%
- 0-10V dimming
- Goof Ring and New Construction Plate available, sold separately
- Emergency Battery Backup available, sold separately
- L70 Lifetime>50,000 Hrs

PRODUCT SPECIFICATIONS

Model Number	Input Voltage	CRI	Wattage(W)	Efficacy(LM/W)	Lumens(LM)
DR4T-16-T2-G2	120-277V	>80	6	100	600
			8		800
			10		1,000
			12		1,200
			16		1,600

PRODUCT DIMENSION

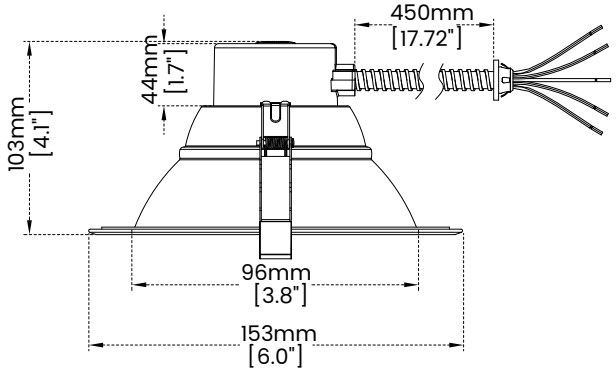

©2026 ATG Electronics
10588 Monte Vista Avenue
Montclair, CA 91763

www.atgledlighting.com
T:951.245.6222
E: sales@atgledlighting.com

DR4T
4" DUO SELECTABLE RETROFIT DOWNLIGHT

FEATURES


- Front IP54
- Aluminum lamp body
- Deep reflector design
- Low glare



Power Box
- PC material
- Internal flicker free driver
- 0-10V dimming

COLOR SELECT ADJUSTMENT SWITCH
Set dip switch to adjust CCT between 2700K, 3000K, 3500K, 4000K, and 5000K.


Spring installation
Can be installed in the junction box or can.

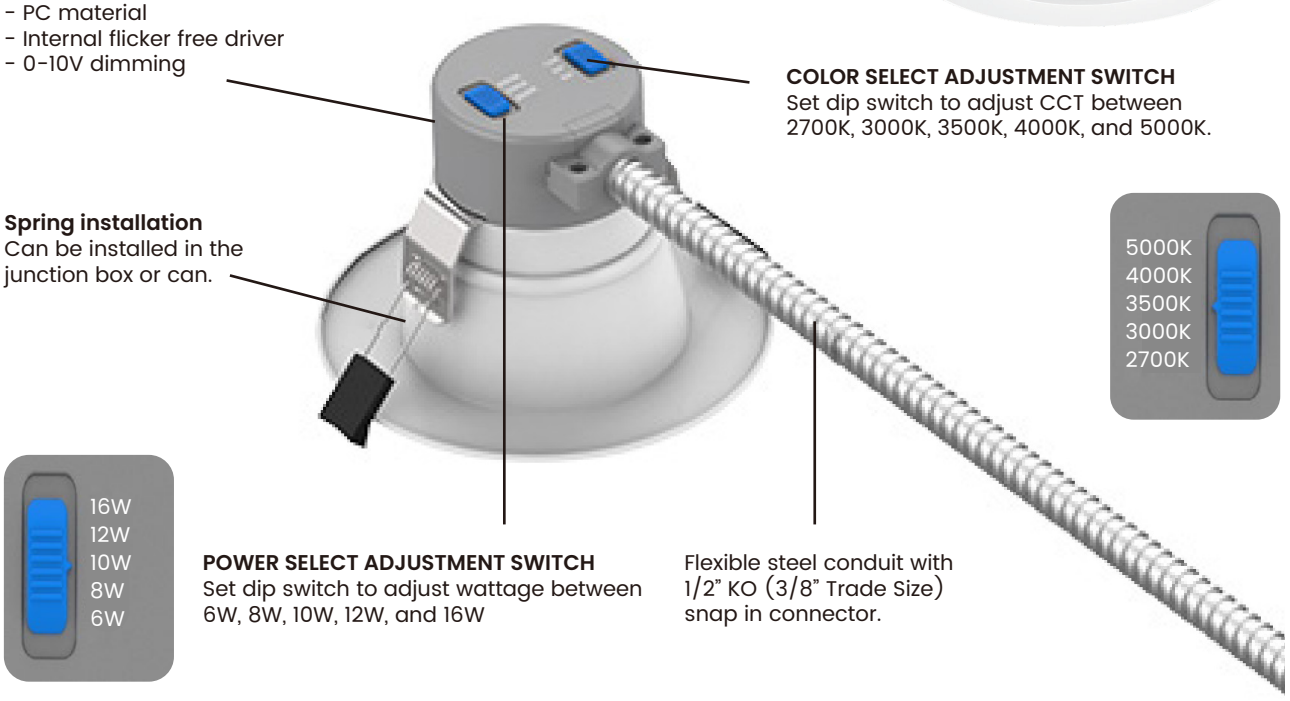

POWER SELECT ADJUSTMENT SWITCH
Set dip switch to adjust wattage between 6W, 8W, 10W, 12W, and 16W

Flexible steel conduit with 1/2" KO (3/8" Trade Size) snap in connector.

ACCESSORIES




GR-DR4-G2
Goof Ring 4"



GR-DR6-G2
Goof Ring 6"




GR-DR8-G2
Goof Ring 8"



GR-DR10-G2
Goof Ring 10"



NCP-DR-G2-TG
New Construction or Remodel Plate for T-grid Ceilings



NCP-DR-G2-SJ
New Construction Plate for Stud/Joist Ceilings



Safety Lanyard



EMW2-08170DI-HY

©2026 ATG Electronics
10588 Monte Vista Avenue
Montclair, CA 91763

www.atgledlighting.com
T:951.245.6222
E: sales@atgledlighting.com

Data subject to change. Last Edited: May 30 2026 10: 00 PM