



RoHS CE



50FT Plug and Play PIR Sensor



ANT-6-4R-H



ANT-6-ZT10-H





ANT-6-4T-H




ANT-6-4H-H

Dimensions



Unit:mm




ANT-6-4R-H

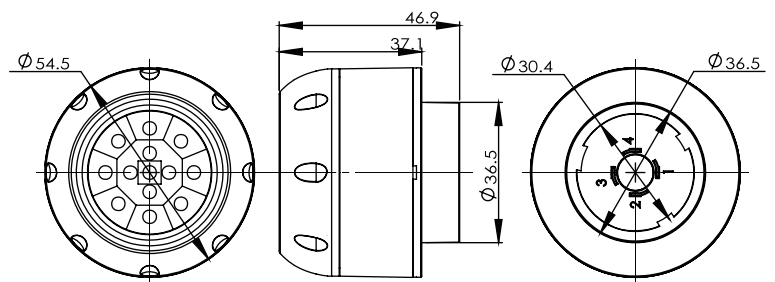

ANT-6-ZT10-H



ANT-6-4T-H

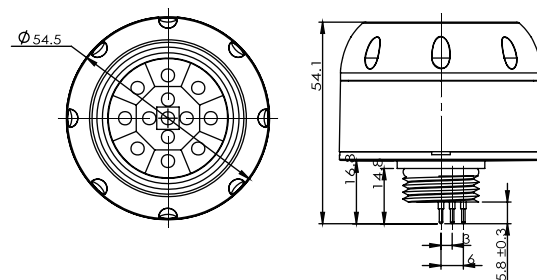


ANT-6-4H-H


Technical parameters

Power supply	12V-24V DC, >30mA
Dim control output	0-10V, max. 25mA sinking current
Remote range	50ft. (15m) indoor, no backlight
Dim control output	0-10V
Time setting	10s/1min/5min/10min/15min/ 20min/30min/60min
Mounting height	Max 50ft.(15meters)
Detection radius	20%/50%/75%/100%(1-8m)
Light-control	24H/10LUX/30LUX/50LUX
Temperature	-4°F--+140°F (-20°C--+60°C)
IP rating	IP65
Parameter Setting	Via Remote Control or Knobs


Wiring Diagrams



ANT-6-4R-H




ANT-6-4H-H



- Port 1: 12-24VDC
- Port 2: DIM-/GND
- Port 3: DIM +
- Port 4: DIM+

ANT-6-ZT10-H



ANT-6-4T-H

Installation diagram

