




ACE

Tennis Court Sports Light



ACE Tennis Court Sports Light

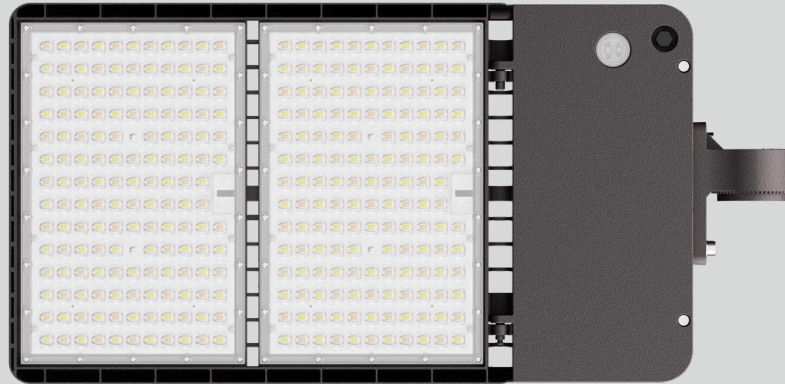

DESCRIPTION

LED Tennis Court Sports Light | Power & CCT Selectable | IP65 | 120-277VAC (347-480VAC Optional) | Multiple Mounting Options | -40°F(-40°C) to 122°F(50°C) Operating Temp



CONSTRUCTION

- Rugged die-cast aluminum housing contains factory prewired driver and optical unit

MOUNTING

- With 4 different mounts: Yoke Mount, Slipfitter, Arm Mount and Trunnion Mount

OPTICS

- One piece PC optic sheet delivers industry leading optical control
- T3 and T4 distribution available

ELECTRICAL

- 120-277VAC (347-480VAC Optional)
- 0-10V dimming
- Power Factor > 0.9, THD < 20%
- Surge Protection: L/N 6KV, L/N-P 6KV (optional 10KV SPD)

CONTROL

- Available with plug-in and Zhaga socket microwave sensor options
- Optional integral Bluetooth programmable motion and photocell sensor
- NEMA 3-pin and 7-pin photocell

OPERATION TEMPERATURE

- -40°F(-40°C) to 122°F(50°C)

WARRANTY

- L70 lifetime >100,000 hrs based on TM-21 calculation
- Industry leading 10-year warranty for main components

LISTINGS

- UL Listed, Suitable for wet locations
- DLC Premium (Pending)
- Title 24 Compliant; see local ordinance for qualification information
- IP65 Rated
- 3G rated for ANSI C136.31 high vibration applications


ACE
Tennis Court Sports Light

PRODUCT SPECIFICATIONS

Model Number	Input	Nominal Wattage(W)	CRI	CCT	T3			T4		
					Wattage (W)	Efficacy (LM/W)	Lumens (LM)	Wattage (W)	Efficacy (LM/W)	Lumens (LM)
ACE-500-T1	120-277VAC	400	>80	3000K	397	154	61,115	397	154	60,956
				4000K	382	167	63,818	382	168	64,202
				5000K	397	157	62,274	397	157	62,105
		450	>80	3000K	441	151	66,537	441	150	66,205
				4000K	424	166	70,351	424	165	70,090
				5000K	441	153	67,445	441	153	67,394
		500	>80	3000K	492	148	72,826	487	147	71,635
				4000K	475	166	78,707	471	166	78,043
				5000K	497	155	77,016	491	153	74,987

*All T4 data are based on in-house IES files. T3 data at 500W are based on in-house IES files.


*Other T3 data are extrapolated.

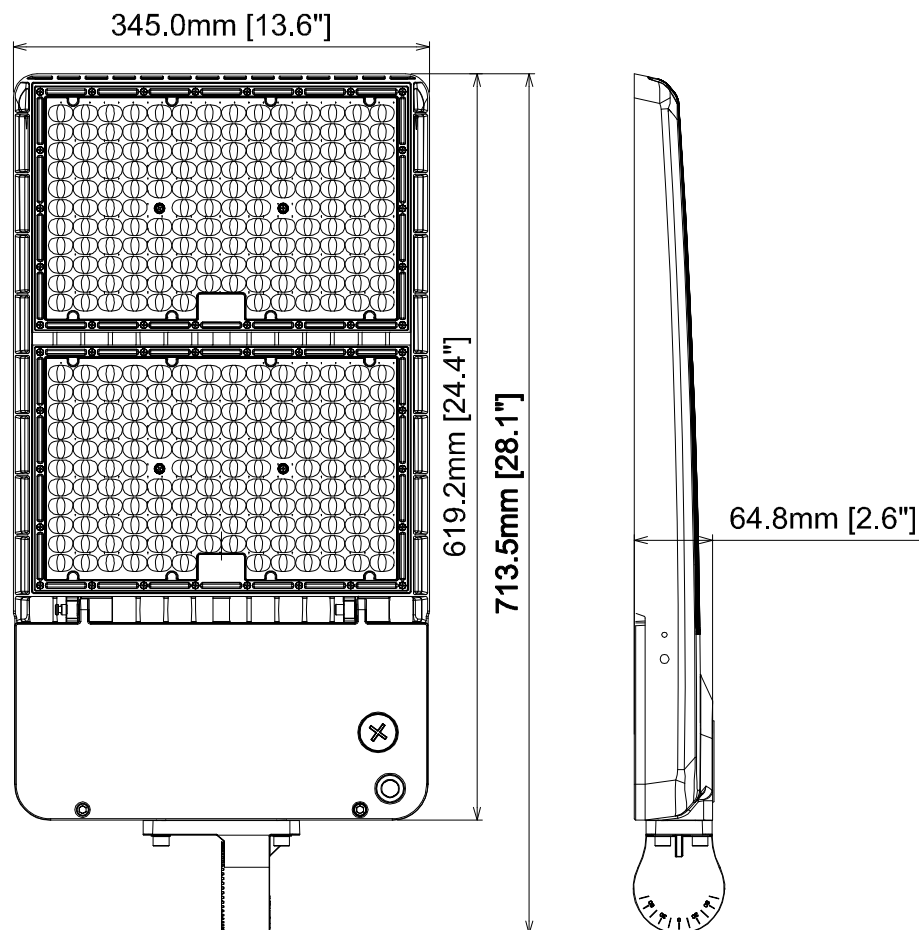

ACE Tennis Court Sports Light


PHOTOMETRIC SPECIFICATIONS

ACE-500-T1-T3

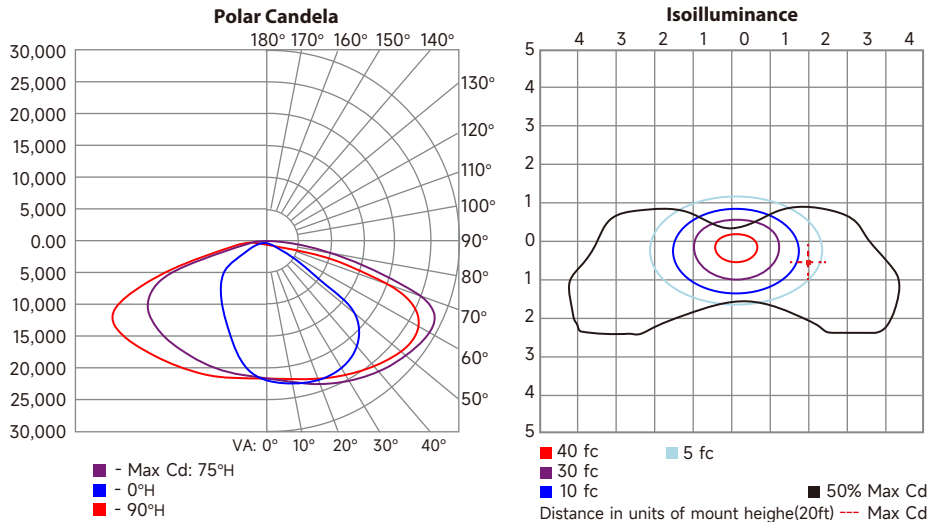

Type III Distribution		
DESCRIPTION	500W, 4000K,80 CRI	
LUMENS(LM)	78707	
WATTS(W)	475.4	
EFFICACY(LM/W)	165.6	
IES TYPE	TYPE III,Short	
BUG	B5-U0-G5	
Zonal Lumen Summary		
Zone	Lumens	% Luminaire
Low (0-30)°	9,503.8	12.1%
Medium (30-60)°	26,279.9	33.4%
High (60-80)°	12,488.7	15.9%
Very High (80-90)°	607.0	0.8%
Uplight (90-180)°	0.0	0.0%

ACE-500-T1-T4

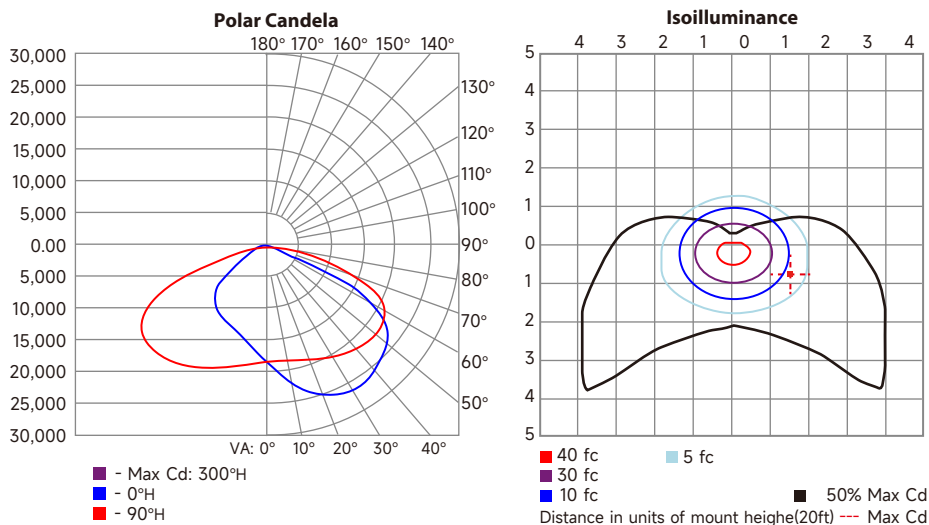

Type IV Distribution		
DESCRIPTION	500W, 4000K,80 CRI	
LUMENS(LM)	78,043.0	
WATTS(W)	470.8	
EFFICACY(LM/W)	165.8	
IES TYPE	TYPE IV,Short	
BUG	B5-U0-G5	
Zonal Lumen Summary		
Zone	Lumens	% Luminaire
Low (0-30)°	8,778.0	11.2%
Medium (30-60)°	26,869.4	34.4%
High (60-80)°	14,946.8	19.2%
Very High (80-90)°	865.0	1.1%
Uplight (90-180)°	0.0	0.0%

ACE Tennis Court Sports Light

ACCESSORIES(SOLD SEPARATELY)

MOUNTING ACCESSORIES

SUFFIX	MODEL NUMBER	DESCRIPTION
SF	MSF-ACE-00	Slipfitter for 500W ACE Sports Light
YK	MYK-ACE-00	Yoke Mount for 500W ACE Sports Light
TN	MTN-ACE-00	Trunnion Mount for 500W ACE Sports Light
AM	MAM-ACE-00	Arm Mount for 500WS ACE Sports Light
TA	MTA-ACE-00	Tennis Arm Mount for 500W ACE Sports Light
SHD	SHD-ACE-00	Backlight Shield



MSF-ACE-00



MYK-ACE-00



MTN-ACE-00



MAM-ACE-00

SENSORS&PHOTOCELLS


SUFFIX	MODEL NUMBER	DESCRIPTION
S5	ANT-5-4T	Plug-in Microwave Motion Sensor, 12VDC
S5B	ANT-5-4T-BLE-SR	Plug-in Bluetooth Microwave Motion Sensor, 12VDC, SILVAIR Platform
R1	RC-100	Remote for ANT-5-4T
P1	JL-207C	3-pin Photocell, 120-277VAC
P2	JL-207F	3-pin Photocell, 480VAC



ANT-5-4T



ANT-5-4T-BLE-SR



JL-207C



JL-207F

SPD

SUFFIX	MODEL NUMBER	DESCRIPTION
SP1	SPD-P10U	10KV Surge Protector, 120-277VAC
SP2	SPD-P20H	20KV Surge Protector, 347-480VAC

ORDER FORMAT

Series	Wattage	CCT	Input	Optics	Finish	Mounting	Control★
ACE	500=500W/450W/ 400W Selectable	T1=3000K/4000K/ 5000K Selectable	Blank=120-277VAC V=347-480VAC	T3=Type III T4=Type IV★	Blank= Bronze** W= White B= Black G= Black	SF= Slipfitter YK= Yoke Mount TN= Trunnion Mount AM= Arm Mount SHD= Backlight Shield	P1= JL-207C P2= JL-207F S5= ANT-5-4T S5B= ANT-5-4T-BLE-GE R1= RC-100

* Default optics is T4, contact our sales for other options. Extra lead time and cost may apply.


**Default finish is bronze, contact our sales for other options. Extra lead time and cost may apply.

★Receptacles are not pre-installed. For control options, please contact our sales.


ACE
Tennis Court Sports Light

ACE POLE DRILLING DETAIL


Direct Mount Pole drilling detail

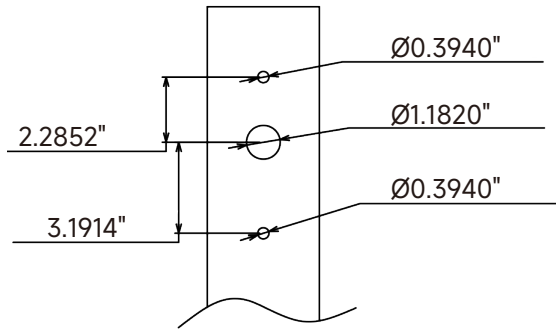


Slipfitter Mount Pole detail

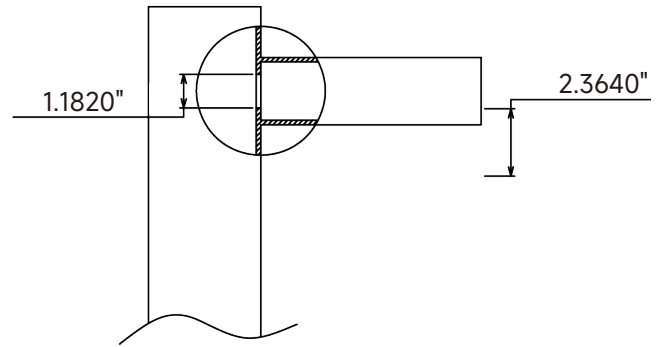




Trunnion Mount Pole drilling detail

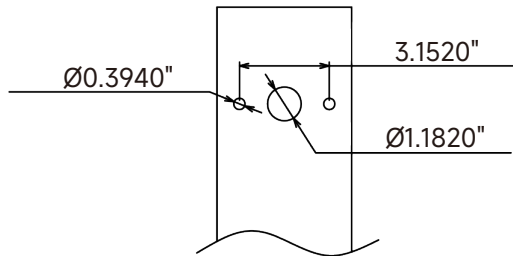

Yoke Mount Pole drilling detail

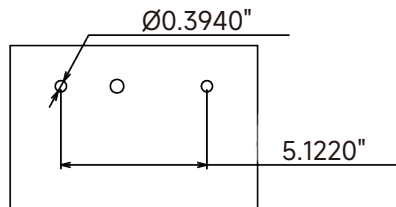

ACE Tennis Court Light-EPA

						
0.568	0.8352	1.1232	1.136	1.404	1.3896	1.404