




LSD

Power&CCT Selectable Stairwell Fixture

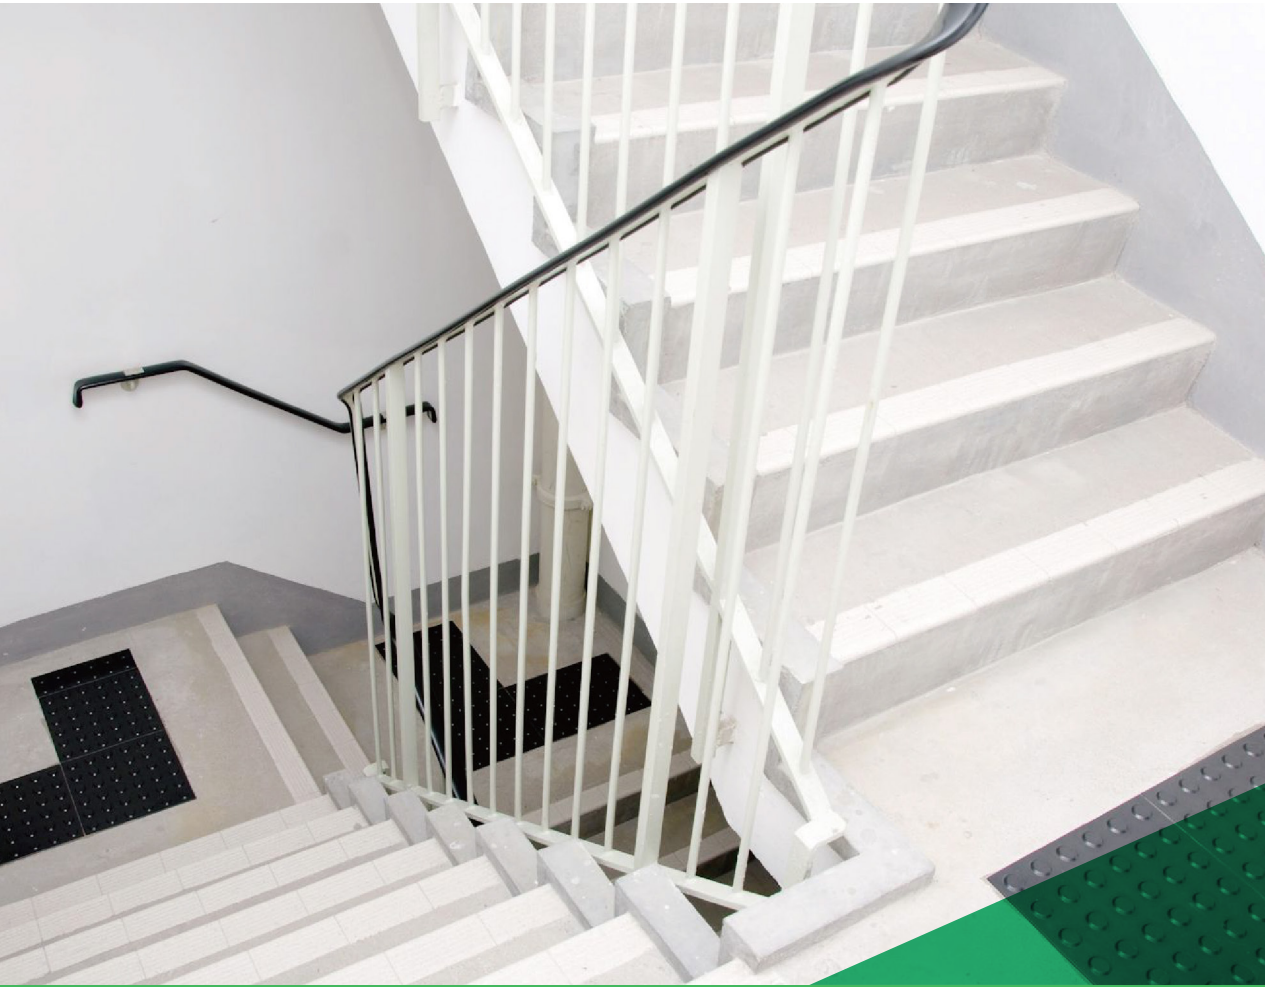

LSD

Power & CCT Selectable Stairwell Fixture



DESCRIPTION

LED Stairwell Fixture | 2ft&4ft | Power & CCT Selectable | CRI>80
| 120-277V | 0-10V Dimming | Ultrasonic Sensor Optional



PRODUCT FEATURES

- Soft-glow acrylic lens, reduces glare and provides even light distribution
- UL listed for damp locations
- Surface/wall mount comes standard, V-hook and chain optional
- Powered by 0-10V dimming driver(down to 10%)
- Feature power selectable technology: 3 step power adjustable
- Feature CCT selectable technology: adjust CCT between 3500K/4000K/5000K
- 12VDC AUX output for extended wireless control
- Ambient operating temperature: -20°C(4°F) to 50°C(122°F)
- CRI>80, PF>0.95, THD<20%
- Ultrasonic sensor available, EM unit available
- L70>100,000 hrs, 10 years limited warranty

PRODUCT SPECIFICATIONS


Model Number	Input Voltage (Vac)	Nominal Watts(W)	3500K			4000K			5000K		
			Watts (W)	Efficacy (LPW)	Output (LM)	Watts (W)	Efficacy (LPW)	Output (LM)	Watts (W)	Efficacy (LPW)	Output (LM)
LSD-2FT-15-T1-F-U1	120-277	25	25	134	3,350	25	136	3,400	25	135	3,375
		20	20	136	2,720	20	138	2,760	20	137	2,740
		15	15	138	2,070	15	140	2,100	15	139	2,085
LSD-4FT-30-T1-F-U1	120-277	50	49	121.6	5,932	46	133.3	6,194	49	122.2	6,001
		40	37	127.5	4,735	36	137.1	4,874	37	128.0	4,750
		30	30	131.2	3,910	29	139.4	4,012	30	131.9	3,958
LSD-4FT-45-T1-F-U1	120-277	65	65	134	8,710	65	136	8,840	65	135	8,775
		55	55	136	7,480	55	138	7,590	55	137	7,535
		45	45	138	6,210	45	140	6,300	45	139	6,255
LSD-4FT-70-T1-F-U1	120-277	90	90	134	12,060	90	136	12,240	90	135	12,150
		80	80	136	10,880	80	138	11,040	80	137	10,960
		70	70	138	9,660	70	140	9,800	70	139	9,730

* Data for LSD-4FT-30-T1-F-U1 is based on IES file. Others based on nominal data.

**Only LSD-4FT-30-T1-F-U1 is DLC listed. Other models are DLC pending.

LSD
Power & CCT Selectable Stairwell Fixture

PHYSICAL SPECIFICATIONS

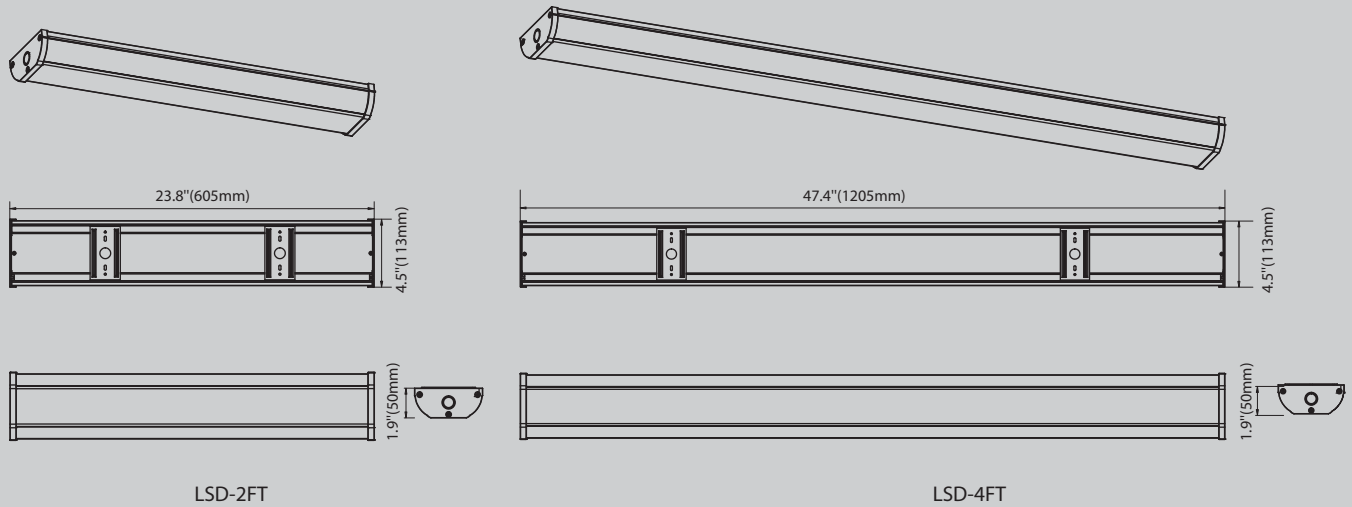

DIMENSION


MODEL	LENGTH	WIDTH	HEIGHT	PACKING	Gross Weight
LSD-2FT-15-T1-F	605mm(23.8")	113mm(4.5")	50mm(1.9")	24.6"*5.2"*2.8"	8.8 lbs(4 kg)
LSD-4FT-30-T1-F	1205mm(47.4")	113mm(4.5")	50mm(1.9")	48.2"*5.2"*2.8"	16.5 lbs(7.5 kg)
LSD-4FT-45-T1-F	1205mm(47.4")	113mm(4.5")	50mm(1.9")	48.2"*5.2"*2.8"	16.5 lbs(7.5 kg)
LSD-4FT-70-T1-F	1205mm(47.4")	113mm(4.5")	50mm(1.9")	48.2"*5.2"*2.8"	16.5 lbs(7.5 kg)

ACCESSORIES(SOLD SEPARATELY)

ATG CODE	MODEL NUMBER	DESCRIPTION
SZ	PSC-BL-U-FM-DC0	Dimming ultrasonic sensor, 40Khz, 12-24VDC driven
EK	STB41A-08WLi-55	Emergency Kit, Input: 120-277VAC, Emergency Output: 8W, 150-170VDC
BSZ	PSC-BL-U-FM-DC0-BLE	Dimming ultrasonic sensor, 40Khz, 12-24VDC driven, Bluetooth version



PSC-BL-U-FM-DC0



STB41A-08WLi-55

LSD

Power & CCT Selectable Stairwell Fixture

ORDER FORMAT

Series	Size	Wattage	CCT	Input	Lens	Finish	Sensor
LSD		50W					
	2FT= 2FT	15=15W/20W/25W Select	T1=3500K/4000K/5000K Select	Blank= 120-277Vac	F= Frosted	-Blank= White	U1=Ultrasonic Sensor
	4FT= 4FT	30= 30W/40W/50W Select					
		45= 45W/55W/65W Select					
		70= 70W/80W/90W Select					

QUICK ORDERING GUIDE

✓	Part Number	Description	Quick Shipping
	LSD-2FT-15-T1-F-U1	LSD DUO Architectural LED Stairwell, 1-10V dimming, 2ft, 15W/20W/25W, 3500K/4000K/5000K, 120-277VAC, Frosted Lens, w/ Ultrasonic Sensor	
	LSD-4FT-30-T1-F-U1	LSD DUO Architectural LED Stairwell, 1-10V dimming, 4ft, 30W/40W/50W, 3500K/4000K/5000K, 120-277VAC, Frosted Lens, w/ Ultrasonic Sensor	✓
	LSD-4FT-45-T1-F-U1	LSD DUO Architectural LED Stairwell, 1-10V dimming, 4ft, 45W/55W/65W, 3500K/4000K/5000K, 120-277VAC, Frosted Lens, w/ Ultrasonic Sensor	
	LSD-4FT-70-T1-FU1	LSD DUO Architectural LED Stairwell, 1-10V dimming, 4ft, 70W/80W/90W, 3500K/4000K/5000K, 120-277VAC, Frosted Lens, w/ Ultrasonic Sensor	
	STB41A-08WLi-55	Emergency Kit, Input: 120-277Vac, Emergency Output: 8W, 150-170VDC	✓