

POST TOP SERIES

INSTALLATION MANUAL



SAFETY INFORMATION


BE SURE THE POWER IS OFF! RISK OF ELECTRICAL SHOCK: Always use the switch to power off. Do not perform any operations while this unit is powered on. The electrical system you want to connect the device to must be grounded. Read the instructions before using or powering this device. The safety instructions must remain with the unit in case of transfer. Any damage to the device linked to an inappropriate use is excluded from support by the warranty. Before connecting, make sure that the current and voltage are compatible with this device. We highly recommend that all installations are made by QUALIFIED ELECTRICIAN. We are NOT responsible by any means for the use or misuse of the following information. We are NOT responsible in whole or part for any harm or damage that may or may not be caused. We reserve the right to revise the components of any product, due to part availability or change ETL, CUL, UL standards without assuming any obligation or liability to modify any products previously manufactured and without notice. These instructions do not cover all details of variations in equipment, nor do they provide every possible contingency to be met. Turn off / unplug power when installing or service device.

PRE - INSTALLATION


- Carefully remove the fixture from the carton.
- Before beginning assembly, installation, or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.
- Tools required for assembly (Not Included): screwdriver, phillips screwdriver, pliers, electrical tape, wire cutters, safety glasses, ladder, wire stripper.

POST TOP INSTALLATION


(Caution: Before beginning installation turn off the circuit breaker and light switch)

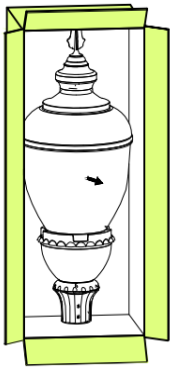

1.Remove the product from its packaging.

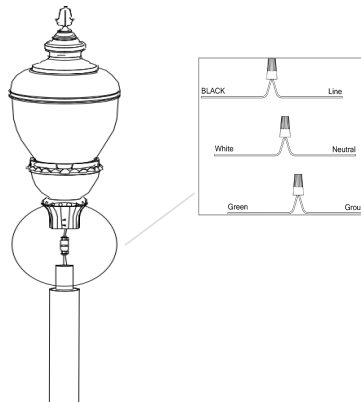

2.Loosen grub screws. Feed supply cable in to column and position the luminaire head.

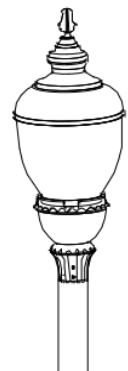

3.Connect power cable and waterproof measures to maintain the same IP rating. Tighten grub screws to lock the luminaire head in position

Factory setting: Power:80W CCT:4000K

Adjust the power or CCT according to requirements ,

1. Open the electrical box .
2. Adjust the power or CCT
Four levels of power adjustable
(100W/80W/60W)
Three levels adjustable color temperature
(3000K,4000K,5000K)
3. Secure the screws
4. Install the post top to the pole
5. Completed

Factory setting: Power 80W CCT:4000K

3. Secure the screws
4. Install the post top to the pole
5. Completed