

■ ■ ■ ANT-6-4H-BLE-GE

FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

12-24V 0-10V DC Bi-level 3PIN Receptacle

Bluetooth PIR Sensor

ANT-6-4H-BLE-GE uses PIR motion detector architecture and passive infrared (PIR) technology for improved detection coverage for high bay applications.

It utilizes a Bluetooth Low Energy (BLE) mesh network. Dimming levels and schedules can be set through GEBC app.

3PIN design, low voltage connector, match with Sharkward ANT-5-16S3.

GEBC
Bluetooth®

Download on the
App Store



google play




TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	40ft(12m) Max.
Detection angle	360°
Operating temperature	-20°C-60°C
IP rating	65
Max Bluetooth Range	200ft(60m)
Warranty	5years




SENSOR COVERAGE

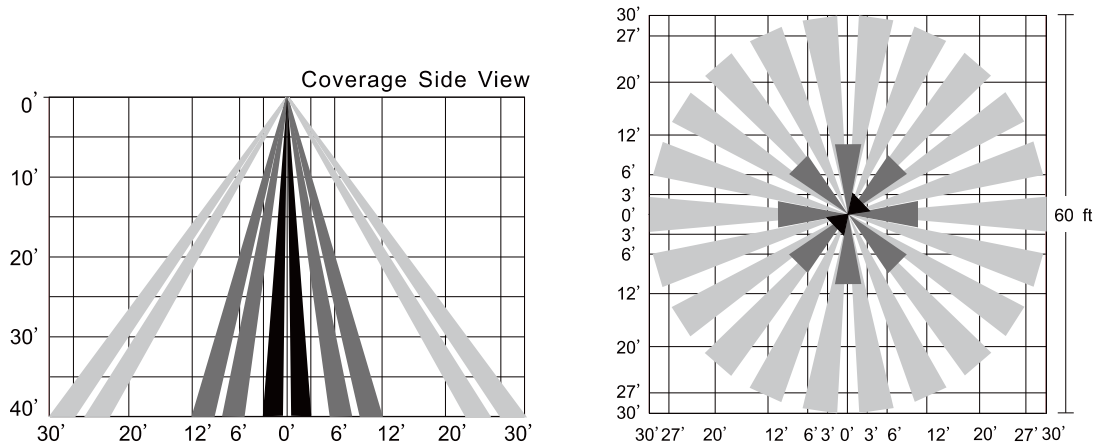

DIMENSIONS AND APPEARANCE

Unit:mm

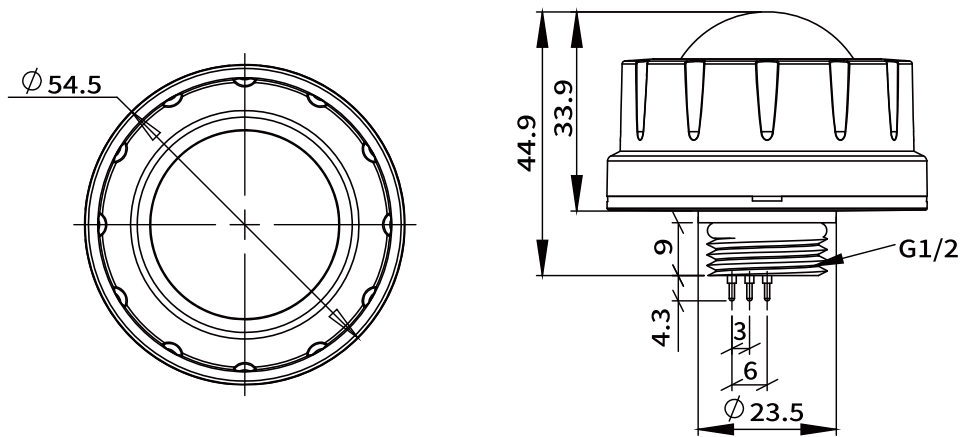

WIRING DIAGRAM

