

LED LINEAR WALL WASHER

WWLE Linear Wall washer series is a powerful 120-277V color-changing LED flood light typically used for building facades, signs or any wall washing application. Available in multiple optical lens options to provide endless lighting solutions. Available in 15°, 30°, 45°, 60°, 15x55°, 20x40° optic options.



FEATURES

HOUSING	Aluminum Alloy
LENS	Tempered Glass
COLOR	RGBW/3000K/4000K/6500K
INPUT VOLTAGE	120-277V
POWER CONSUMPTION	9W(1FT)/18W(2FT)/36W(4FT)
OPTICS	15°, 30°, 45°, 60°, 15x55°, 20x40°
CONTROL TYPE	DMX512 / RDM*
COMPATIBLE CONTROLLER	Compatible with DMX512 Based Control Solutions
OPERATING TEMPERATURE	-4°F(-20°C)to 104°F (40°C)
LUMEN MAINTENANCE	>30,000 Hours
WARRANTY	5 Years
IP RATING	IP66
CERTIFICATIONS	ETL


*The fixture has no stand-alone programs and must work with a DMX 512 controller(sold separately). Contact our sales team for more details.

PRODUCT SPECIFICATIONS

Part Number	Length	Optics	Input	Color/CCT	Wattage(W)	Efficacy(LM/W)	Lumens(LM)
WWLE-12-RGBW	12"	15°/30°/45° /20x40°	120-277V	RGBW	9	45	405
WWLE-24-RGBW	24"			RGBW	18	45	810
WWLE-48-RGBW	48"			RGBW	36	45	1,620
WWLE-12-30	12"	15°/30°/45°/60° /15x55°/20x40°	120-277V	3000K	9	120	1,080
WWLE-12-40	12"			4000K	9	122	1,102
WWLE-12-65	12"			6500K	9	126	1,134
WWLE-24-30	24"	15°/30°/45°/60° /15x55°/20x40°	120-277V	3000K	18	130	2,340
WWLE-24-40	24"			4000K	18	133	2,387
WWLE-24-65	24"			6500K	18	137	2,457
WWLE-48-30	48"	15°/30°/45°/60° /15x55°/20x40°	120-277V	3000K	36	130	4,680
WWLE-48-40	48"			4000K	36	133	4,774
WWLE-48-65	48"			6500K	36	137	4,914


LED LINEAR WALL WASHER

DIMENSIONS

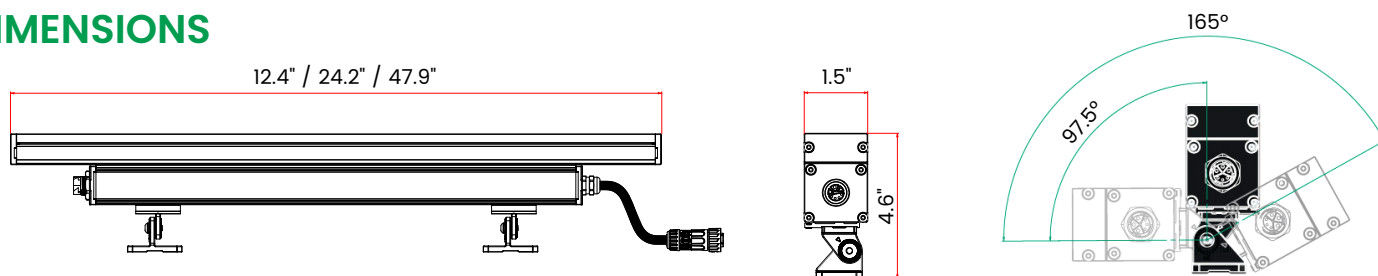

Part Number	Net Weight	QTY	Carton SIZE
WWLE-12	0.9KG(1.9LBS)	16 Units/Ctn	28.2" x 12.2" x 12.8"
WWLE-24	1.5KG(3.3LBS)	12 Units/Ctn	26.2" x 17.9" x 12.8"
WWLE-48	2.6KG(5.7LBS)	6 Units/Ctn	50.1" x 9.3" x 12.8"

DMX CONNECTION GUIDE

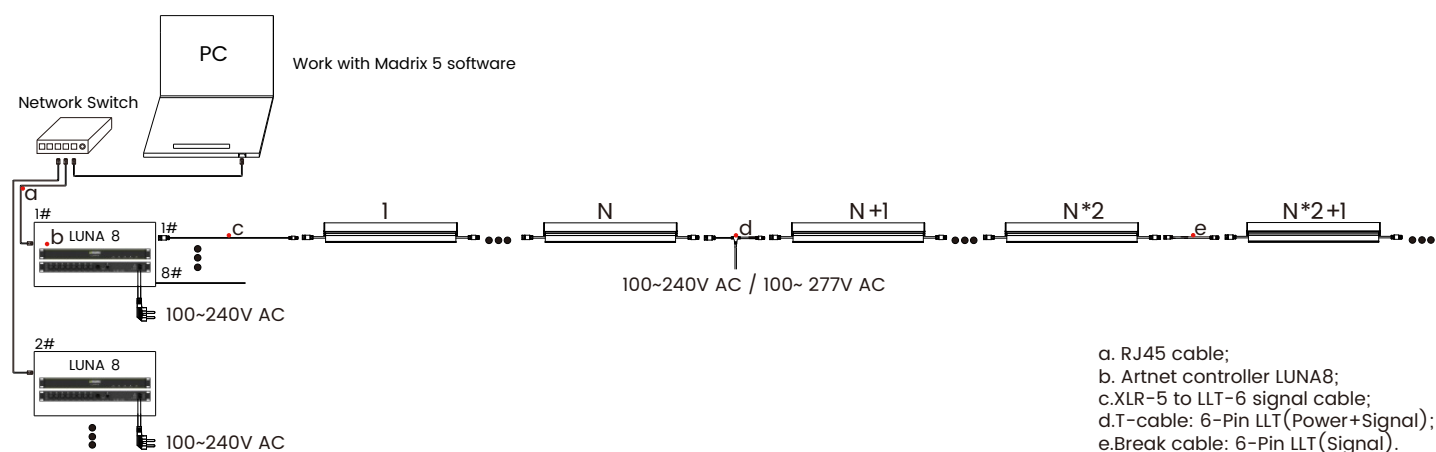

Part Number	Maximum Run			Maximum Signal Connection
	120VAC	220VAC	277VAC	
WWLE-12	66 PCS	146 PCS	184 PCS	128 PCS
WWLE-24	33 PCS	73 PCS	92 PCS	64 PCS
WWLE-48	16 PCS	36 PCS	46 PCS	32 PCS

OPTICS




LED LINEAR WALL WASHER

CORD SETS


PART NUMBER	NET WEIGHT
LNK-WW-01	Link extension cable, 6-pin, black, 20" (0.5m)
LNK-WW-02	Link extension cable, 6-pin, black, 39" (1 m)
LNK-WW-03	Link extension cable, 6-pin, black, 118" (3 m)
LNK-WW-04	Link extension cable, black, 197" (5 m)
BKC-WW-00	Current break cable, black, 0.12" (0.3 m)
INPT-WW-01	Input cable, black, 39" (1 m), 6-pin female connector to bare wire
INPT-WW-TR	Triangle connection input cable, 6-pin male & female connector to bare wire

*All cables are sold separately.

Link Extension Cable




output




Female connector

input



Male connector

Triangle Connection Cable




Wire#	Description	Color
1	N	White 
2	E	Green 
3	L	Black 
4	B-	Pink 
5	GND	Yellow 
6	A+	Purple 

MOUNTING BRACKETS

PART NUMBER	NET WEIGHT
EX-WWLE-01	Extended mounting brackets, 5.9" (15 cm) long
EX-WWLE-02	Extended mounting brackets, 11.8" (30 cm) long
EX-WWLE-03	Extended mounting brackets, 17.7" (45 cm) long

*All mounting brackets are sold separately.

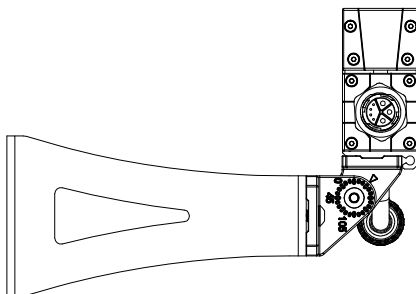


LED LINEAR WALL WASHER

LOUVERS & GLARE SHIELDS

PART NUMBER	NET WEIGHT
LV-WWLE-12	Louver for WWLE-12, 13.8", black finish
LV-WWLE-24	Louver for WWLE-24, 23.9", black finish
LV-WWLE-48	Louver for WWLE-48, 47.9", black finish
GS-WWLE-12	Glare Shield for WWLE-12, black finish
GS-WWLE-24	Glare Shield for WWLE-24, black finish
GS-WWLE-48	Glare Shield for WWLE-48, black finish

*All louvers and glare shields are sold separately.

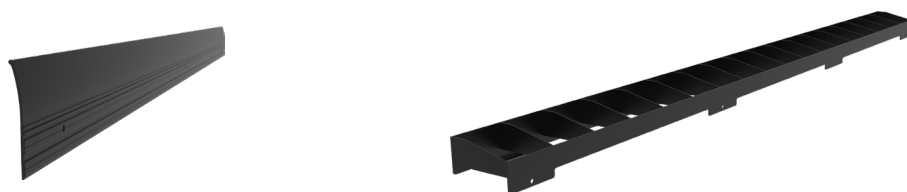

ORDER FORMAT

Series	Length	CCT	Voltage	Optics	Version	Finish
WWLE	12=1ft 24=2ft 48=4ft	RGBW=RGBW 30=3000K 40=4000K 65=6500K	Blank=100-277VAC	15=15° 30=30° 45=45° 60=60° A55=15°x55° A24=20°x40°	P	Blank=Black S=Silver