


LED Floodlighting

500W/600W/750W/1000W/1200W/1500W/1800W



LED Flood Light
Instruction Manual

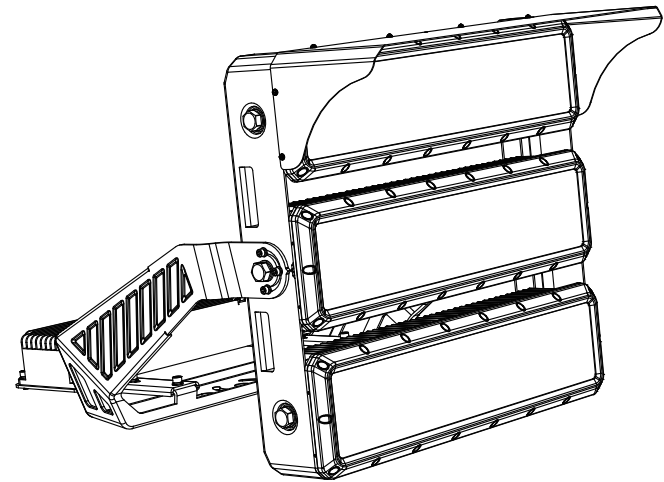

Reminder

We appreciate your purchase!
Please read the instruction manual before installation and keep it for future reference.



Warning

1. To avoid damage, falling, electric shock or fire, please do not modify the lamp or replace accessories without confirming with the supplier first.
2. Please authorize only qualified personnel to install the lamp and ensure they follow the instruction manual. Any improper installation might cause falling, electric shock, fire, or other injury, damage or hazard.
3. Please disconnect power before installation or any maintenance of the lamp.
4. Please disconnect power if it begins to smoke or emit odors, since fire or electric shock may occur. Ask a qualified person to inspect and maintain the luminaire.
5. Please do not dismantle the lamp without the supplier's authorization.
6. Please do not touch the power supply when the lamp is operating.
7. If the external flexible cable or cord of the luminaire is damaged, it should only be replaced by the supplier, a service agent or qualified person.
8. Terminal block not included. The electrical fitting must be installed by a licensed electrician.
9. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
10. For use in environments where an accumulation of non-conductive dust on the luminaire may be expected.



Caution risk of electric shock



Application

With aluminum heat sink, high-brightness SMD chip, high-efficiency constant current and voltage power driver, LED Flood Light is designed for Outdoor Stadium/ Wharf/ Apron Lighting/ Large Area Illumination etc.




Technical Parameters

Product Specifications	500W/600W(A)		500W/600W(B)		750W/1000W/1200W		1500W/1800W
Input Voltage	AC100-240V						
Power Frequency	50/60Hz						
Outlook Dimensions	480×338×545mm 18.9"×13.6"×21.4"		555×651×242mm 21.9"×25.6"×9.5"		641×644×438mm 25.2"×25.4"×17.3"		719×661×570mm 28.3"×26.0"×22.4"
Luminaire Net Weight	500W 16.15±0.2 kg 35.6±0.5lbs	600W 17±0.2 kg 37.5±0.5lbs	500W 17.11±0.2 kg 37.7±0.5lbs	600W 17.95±0.2 kg 39.6±0.5lbs	750W 25.59±0.2 kg 56.4±0.5lbs	1000W 28.4±0.2 kg 62.6±0.5lbs	1800W 37.08±0.2 kg 81.7±0.5lbs
Working Temperature	-30℃ to +50℃ (-22℉ +122℉)						
Storing Temperature	-40℃ to +70℃ (-40℉ +158℉)						




Installation Instructions




VUL-1Module(A)
500W/600W



VUL-1Module(B)
500W/600W



VUL-2Module
750W/1000W/1200W








VUL-3Module
1500W/1800W

Package List



Lamp body	1pcs
Visor	1pcs
M4 Combination screw	8pcs
M4 screw	1pcs
Installation instructions	1pcs

Installation Introduction

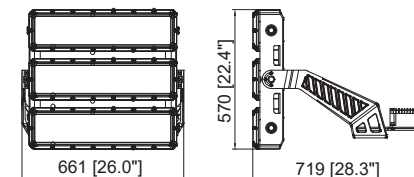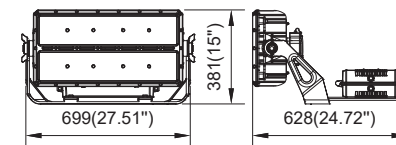



Installation Introduction

1Module(500/600W):

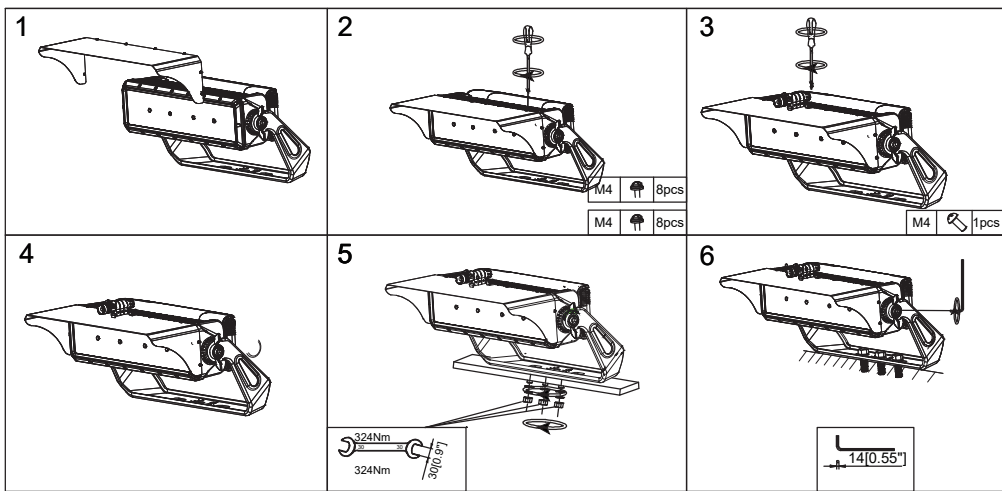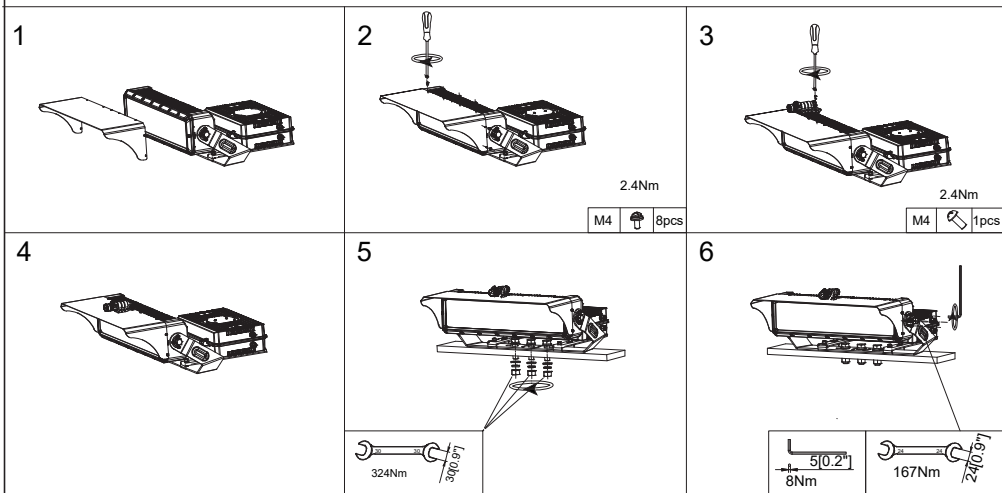


Installation Introduction

2Module(750W/1000W/1200W):

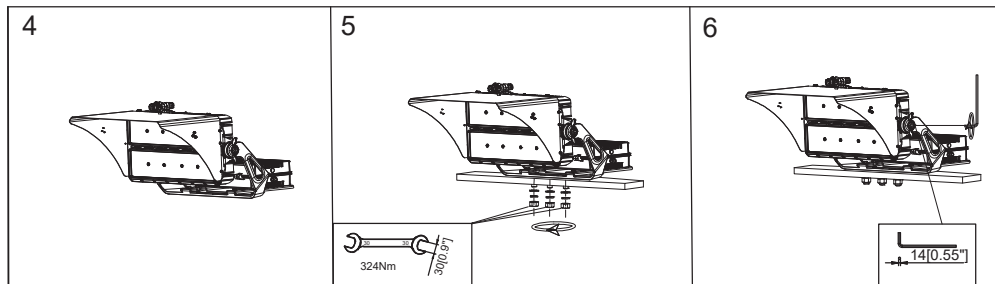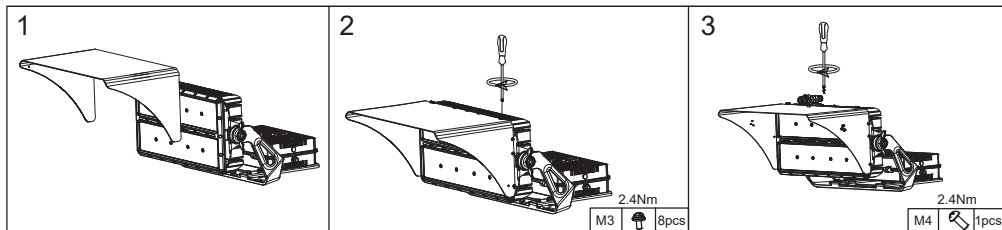

3Module(1500/1800W):

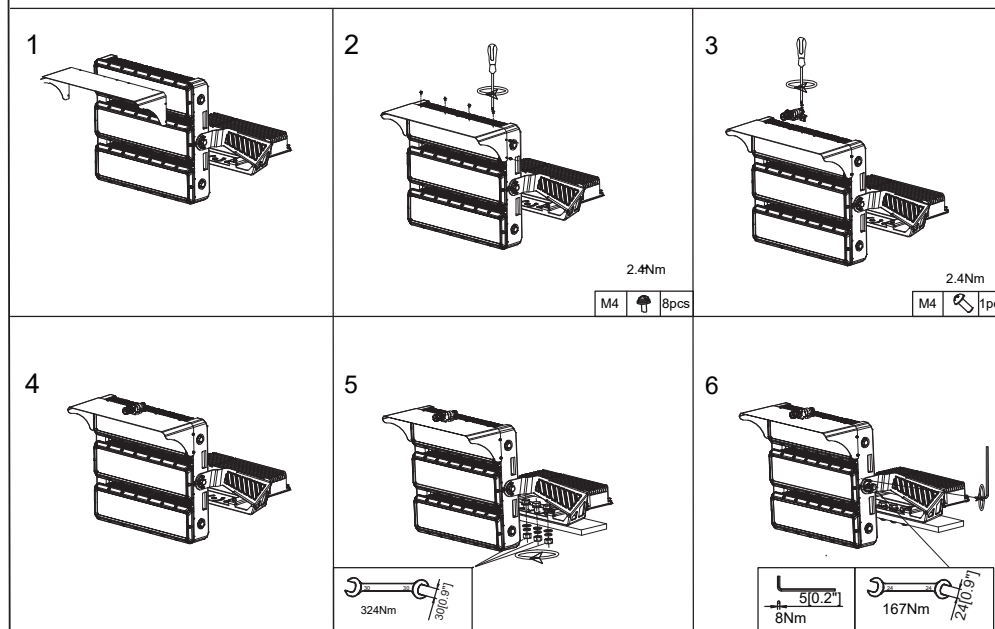

Beam Angle

Beam Angle	Driver box	Driver
	NON DIMMABLE <ul style="list-style-type: none"> L brown black N blue white ⊕ yellow/green green 	DIMMABLE <ul style="list-style-type: none"> L brown black N blue white ⊕ yellow/green green Da1/DIM+ black red Da2/DIM- gray brown
	<p>500W/600W/750W/1000W/1200W</p>	<p>1500W/1800W</p>



Troubleshooting

Descriptions	Possible causes	Solutions
LED not working	The power line improperly connected	Re-connect the power cable in the right way
	The power plug loosens	Plug it in tightly
	The LED driver malfunctions	Replace with new drivers
LEDs flickering on and off	The LED chips damaged	Replace with new LED chips
	The driver's output abnormal.	Replace with new drivers
	The LED chips break down.	Replace with new LED chips



Warranty

5 years warranty for original purchaser of LED product that is identified on seller's invoice reflecting its original purchase (the "Product").

1. When filing for warranty claim, you must notify the seller in writing within (60) days after the discovery of the defect, provide proof of purchase such as the invoice and comply with seller's other warranty requirements. Upon receiving that notice, to ascertain why fixtures stop working, evidences would be needed for seller's QC Team to analyze. The seller may require you to promptly return the product to the seller when necessary, freight prepaid.

2. The determination of whether the product is defective shall be made by the seller in its sole discretion with the overall performance of the product.

3. If the seller determines the product is defective, the seller will elect, in its sole discretion, repair the product or replace the product. The seller reserves the right to utilize new, reconditioned, refurbished, repaired or re-manufactured products or parts in the warranty repair or replacement process. Such products and parts will be comparable in function and performance to an original product or part, as determined by the seller in its sole discretion, and warranted for the remainder of the original warranty period. However, cost of labor and equipment to remove the defective product and install a repaired or a replacement product at the end-user facility are excluded. Supplier's aggregate liability with respect to defective product shall in any event be limited to the money paid to the buyer for that defective product.

The following conditions will not be guaranteed.

1. Damage caused by force majeure such as war, riots, sabotage, cyclones, earthquakes, tidal waves, flooding, lightning strikes, explosions, fire, flood, etc.
2. Damage caused by user's improper delivery, defects caused by wrong operation, wrong treatment and destruction of machinery.
3. Dismantling or modification or improper maintenance or repairing of the products without the supplier's authorization.
4. Unauthorized disassembly, modification or improper maintenance or repair of products.
5. The warranty will be void if the product is not used for the purpose for which it was originally designed. In case of dispute, please refer to the laws and regulation of the P.R.C.

The seller has the sole right to interpret and amend the above articles.