

PTC
Classic Shape LED Post Top

DESCRIPTION

LED Post Top Fixture | 3 Different Shapes | 120-277V Input |
Power & CCT Selectable | 0-10V Dimming



PRODUCT FEATURES

- Acorn shaped, classic design, optional decorative parts
- Heavy grade die cast aluminum housing, with low-glare PC diffuser
- Fits 2-3/8" O.D. pole tenon, optional tenon reducer available for 4" and 5" pole
- EPA: 2.37 ft²
- Bronze finish comes standard, custom finish colors available*
- CRI > 70, available with fixed CCT or CCT selectable version
- Type V distribution comes standard
- Wattage selectable: 100W/80W/60W
- IP65 rated, ETL wet location listed
- Operating temperature: -4°F-122°F
- L70 > 60,000 hrs, 5 years warranty offered




PRODUCT SPECIFICATIONS

Model Number	Input	CRI	3000K			4000K			5000K		
			Wattage (w)	Efficacy (LM/W)	Lumens (LM)	Wattage (w)	Efficacy (LM/W)	Lumens (LM)	Wattage (w)	Efficacy (LM/W)	Lumens (LM)
PTC-100-T1-T5	120-277V	> 70	100	102	10,200	100	108	10,800	100	105	10,500
			80	107	8,560	80	115	9,200	80	110	8,800
			60	110	6,600	60	120	7,200	60	116	6,960

*Data is for standard shape. Efficacy will be lower for shapes with decorative parts.

PTC
Classic Shape LED Post Top

PHYSICAL SPECIFICATIONS

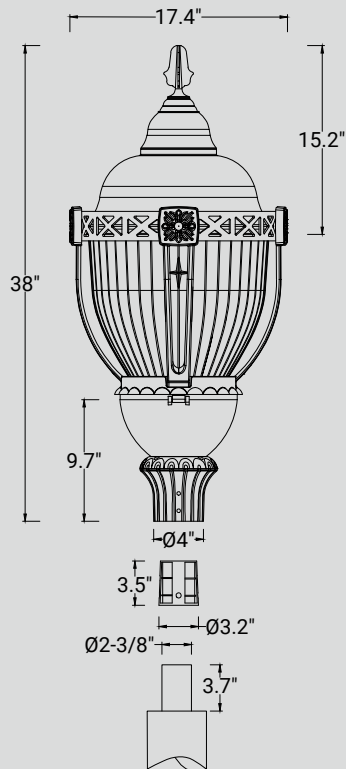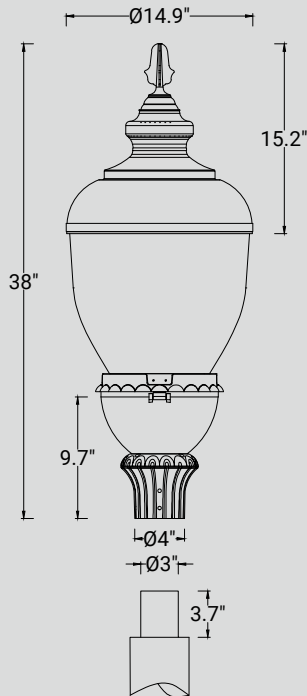

Tenon reducer (TR-PTV2-01)
is available to fit 2-3/8" tenon mount, sold
separately. Extra tenon adapter is needed for 4"
and 5" pole without tenon.

ORDER FORMAT

Series	Wattage	CCT	Input	Optics	Finish*
PTC	100				
	100=100W Selectable	T1=CCT Selectable 30=3000K Fixed 40=4000K Fixed 50=5000K Fixed	Blank=120-277V	T5=Type V	Blank=Bronze B=Black

*For custom finish, pls contact our sales team. Extra lead time and cost may apply.